



XN-1-2216-CTR

- Single/Double Pole; Single/Double Throw
- Ratings:  
16A 125VAC; 8A 250VAC; UL  
8A 250VAC; TUV, CQC
- Features:  
Knob, Terminal & Casing Options see  
selections guide




Circuit Diagram

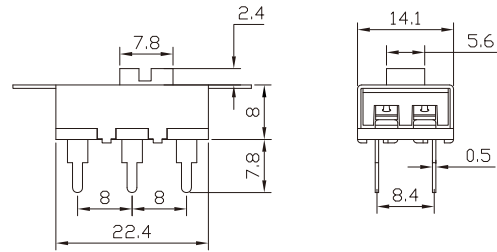


XN-1-2216-XXX

Double Pole ———— Housing Code  
 2 Position ———— Terminal Code  
 Current at 125VAC ———— Actuator Code

Actuator Options

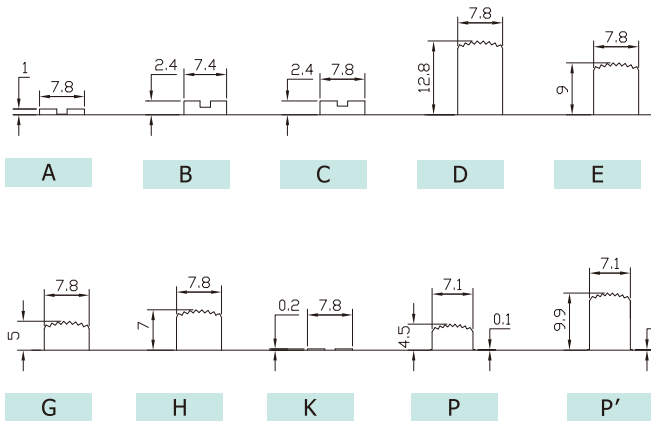

Terminal Options

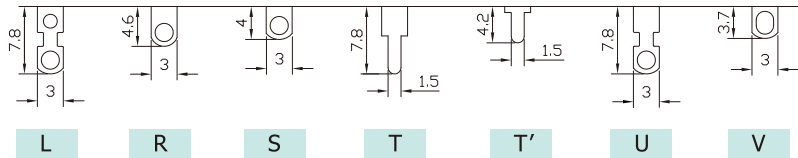

Housing Options

